


# 1. General Information :

## 1-1. Model Number Configuration

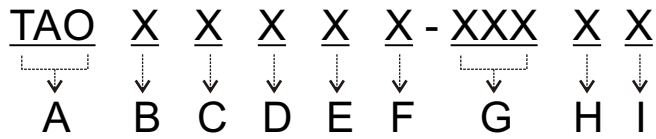

**EX. TAO-A1PA5-USD6+**

- |               |                          |
|---------------|--------------------------|
| A: Model      | E: Bezel + Mounting Kits |
| B: Model Code | F: Bill Box Capacity     |
| C: Voltage    | G: Currency Accepted     |
| D: Interface  | H: Denomination          |
|               | I : New Version Code     |

(A). Model :

Code	Type
TAO	TAO Series

(B): Model Code :

Code	Model Type
A	TAO-A
V	TAO-V
L	TAO-L

(C): Voltage :

Code	Voltage
1	AC 110V
2	DC 12V
3	AC 24V/ DC 24V/ DC 34V

(D): Interface :

Code	Interface
P	Pulse*
M	MDB
D	ID003

\* Pulse interface includes: Pulse + ICT002U + NISR + 5V ENABLE (for USA ONLY)

Note: 1. Harnesses are optional for these interfaces.

2. Please setup DIP SW to switch between the interfaces.

(E): Bezel + Mounting Kits :

Code	Bezel + Mounting Kits
A	Standard bezel + Frame mounting kit
B	Standard bezel + Cover mounting kit
C	Standard bezel + Frame mounting kit ( For TAO Light)
D	Standard bezel + Cover mounting kit ( For TAO Light)
E	Standard bezel (No mounting kit) (TAO-A/V: 3RMB-FAC14000) (TAO Light: 3RMB-FAC17000)

(F): Bill Box Capacity :

Code	Bill Box Capacity
2	200 bills
5	500 bills

(G): Currency Accepted :

Code	Country
USD	United States
MUP	Mexico
AUD	Australia

(H): Denomination :

Code	Denomination
1	1 denomination
2	2 denominations
3	3 denominations
4	4 denominations
5	5 denominations
6	6 denominations
7	7 denominations
8	8 denominations

(I) : New Version Code :

Code	Version
+	New Software (System, Recognition, Tool) + New Hardware (CPU, LED, Sensor)