


Model Number :

A7/V7/S7/N7 Model Number Detail

Model Number Configuration :

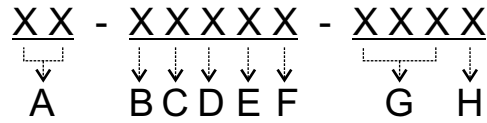

- A : Model Number
- B : Voltage
- C : Stacker
- D : Bezel
- E : Feature
- F : Communication Interface
- G : Currency
- Number of Denomination

Example : V 7 - 3 4 D 1 M - USD 3

1. Model Number :

(A). Product Name :

Code	Product Name
A7	Amusement BA
N7	NISR BA
P7	Plastic
S7	Power saving
V7	Vending BA

(B). Voltage

Code	Voltage
1	AC 110V
2	DC 12V
3	AC 24V / DC 34V

(C). Stacker Size :

Code	Stacker Size
0	No Cassette
1	100 Note
2	200 Note
4	400 Note
8	800 Note

(D). Bezel :

Code	Bezel
A	Compact Bezel + Frame Style Mounting Kit
B	Compact Bezel + Cover Style Mounting Kit
C	Compact Fitted Bezel + Frame Style Mounting Kit
D	Two-Sided Bezel + Frame Style Mounting Kit
E	Compact Fitted Bezel + Cover Style Mounting Kit
F	Compact Fitted Bezel
H	For Horizontal Stacker Bezel
I	TOB
S	Compact Bezel
T	Two-Sided Bezel

●Mounting kit see P.6

(E). Feature :

Code	Feature	
0	Without Magnetic Sensor.	A7/N7/N7/P7
1	With Magnetic Sensor.	A7/N7/N7/P7
3	With Magnetic Sensor (Water Proof).	A7/N7/S7
5	With Green Sensor.	V7G
6	Without Magnetic Sensor (Water Proof).	A7/N7/S7
7	With UV Sensor.	V7UV
8	With Magnetic Sensor for Plastic Note.	P7
9	Without Magnetic Sensor for Plastic Note.	P7

(F). Protocol :

Code	Protocol	
1	ICT001 + Pulse	(Phone-Card Protocol)
3	ICT003 + Pulse	
4	ICT004 + Pulse	
C	C.C.Talk + Pulse	
E	5V Enable + Pulse	
L	Parallel + Pulse	(Need Parallel Board)
M	MDB + Pulse	(AC 24V / DC 34V or Power Saving)
N	NISR	
P	Pulse	
R	ICT001 + Pulse	(Rs232)

(G). Currency (For Example : USD=US Dollar, EUR= Euro) :

(H). Number of Denomination (Ex. 3 = 3 denominations) :